


DSH-600

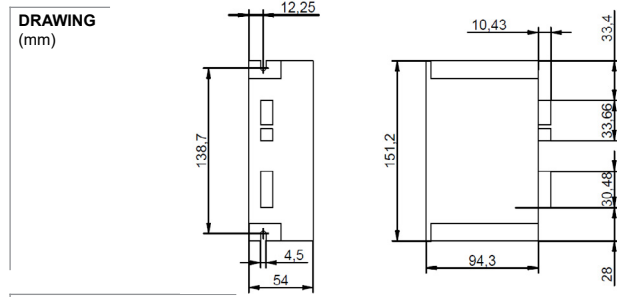

MODEL NO. DESIGNATION

DSH - CURRENT

Example: DSH-600



GENERAL

Model	Current	Weight	IP	Temperature range	Accessories
DSH-600	6 A	0.60 Kg	IP20	0 - 50 °C	Power supplies series Transmotec LRS series

FUNCTIONS

Signal	Description	Function	Setting
ALARM PWR	LED indicators	Green LED on	Motor disabled
	LED indicators	Green LED flashes	Motor enabled
	LED indicators	Red LED 2 flashes / 3 seconds	Under voltage
	LED indicators	Red LED 3 flashes / 3 seconds	Over voltage
	LED indicators	Red LED 4 flashes / 3 seconds	Over current
DIR-	Motor direction signal	+5 V CW rotational direction	0 V CCW rotational direction
DIR+	Motor direction Vcc	+5 VDC to enable direction control	-
PUL-	Pulse signal	Driver input clock pulses max pulse frequency 200 kHz	
PUL+	Pulse Vcc	+5 VDC to enable clock pulses	-
MF-	Motor enable signal	+5 V to enable rotation	0 V to disable rotation
MF+	Motor enable Vcc	+5 VDC to enable the enable operation	-
A- A+ B- B+	Motor phases connection		
DC AC	Power supply 24-110 VDC polarity any 18-80 VAC		

CURRENT A LIMIT SWITCH SETTINGS										MICRO-STEP/STEP PUL/REV SWITCH SETTINGS																
RMS	2.00	2.57	3.14	3.71	4.28	4.86	5.43	6.00		M-S/S	2	4	8	16	32	64	128	256	5	10	20	25	40	50	100	200
Peak	2.40	3.08	3.77	4.45	5.14	5.83	6.52	7.20		P/R	400	800	1.6K	3.2K	6.4K	12.8K	25.6K	51.2K	1K	2K	4K	5K	8K	10K	20K	40K
SW1	ON	OFF	ON	OFF	ON	OFF	ON	OFF		SW5	ON	OFF	ON	OFF	ON	OFF	ON	OFF	ON	OFF	ON	OFF	ON	OFF	ON	OFF
SW2	ON	ON	OFF	OFF	ON	ON	OFF	OFF		SW6	ON	ON	OFF	OFF	ON	ON	OFF	OFF	ON	ON	OFF	OFF	ON	ON	OFF	OFF
SW3	ON	ON	ON	ON	OFF	OFF	OFF	OFF		SW7	ON	ON	ON	ON	OFF	OFF	OFF	OFF	ON	ON	ON	ON	OFF	OFF	OFF	OFF
										SW8	ON	ON	ON	ON	ON	ON	ON	ON	OFF	OFF	OFF	OFF	OFF	OFF	OFF	OFF

FUNCTION SWITCH SETTINGS

SW	Setting	ON-SETTING	OFF-SETTING
SW4	Full and half current	Full current always	Half current when pulse time ≥ 200 ms
SW9	Pulse Smoothing	Motor accelerate and decelerate smoothly	Regular acceleration and deceleration
SW10	N/A	N/A	N/A
SW11	Pulse filter	Enabled low pass filter ≤ 400 Hz	Enabled low pass filter ≤ 100 Hz
SW12	N/A	N/A	N/A
SW13	Pulse mode not supported	Always off	Always off
SW14	Self-test	Connect only driver and power to motor. Motor should run by internal pulses at 5 kHz	Normal connection

