


DRAWING (mm)



PHOTO

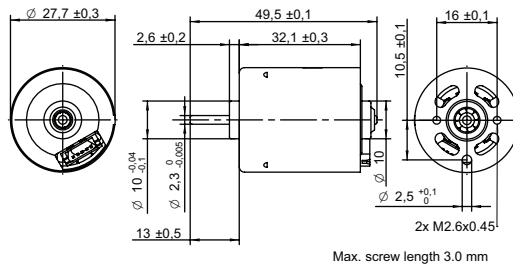

MODEL NAME DESIGNATION

BT2832 - VOLTAGE - INTEGRATED DRIVER

Example: BT2832-12-I

OPTIONS POWER SUPPLIES



● C = Customizations are offered on demand even for smaller quantities. Typical customizations indicated with green dot at column end. Please contact us for any customization request.

MOTOR TYPE


Brushless DC motor with integrated speed control driver.

MOTOR DATA		12V	24V	C
Nominal voltage	V	12	24	
No load speed	rpm	6000		
No load current	mA	49	34	
Nominal speed	rpm	5200	5100	●
Nominal torque	mNm	5.9	5.8	
Nominal current	A	0.4	0.2	
Start/Stall torque	mNm	39	38	
Start/Stall current	A	2.2	1.0	
Max. efficiency	%	74	70	
Nominal power	W	3.2	3.1	
Terminal resistance	Ω	4.1	19	
Terminal inductance	mH	1.7	7	
Torque constant	mNm/A	19	39	
Speed constant	rpm/V	500	250	
Speed/ torque gradient	rpm/mNm	880	880	
Rotor inertia	gcm <sup>2</sup>	14~17	13~16	

MECHANICAL DATA

			C
Bearing type		Ball bearing	●
Axial play	mm	0	
Bearing radial clearance	μm	10	
Max. axial load (dynamic)	N	3.2	
Max. force for press fits (static)	N	4.9	

MOTOR DATA DIAGRAM 12V

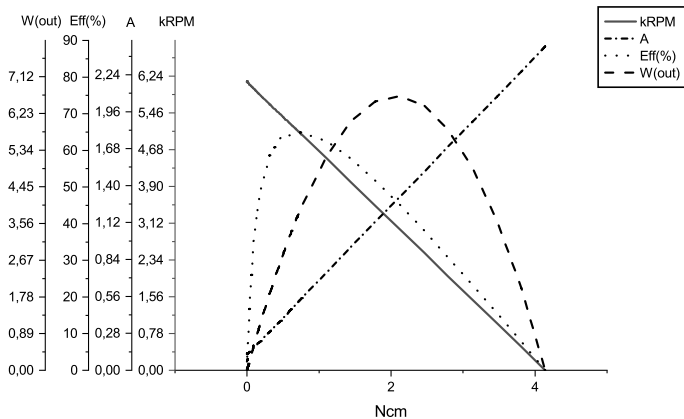

OTHER SPECIFICATIONS

		12V	24V	C
Number of pole pairs		2		
Number of phases		3		
Weight of motor	g	71	70	
Typical noise level	dBA	33	33	
Operating temperature	°C	-40 to +80		
Max. winding temperature	°C	150		
Motor insulation class		A		
IP rating		IP40		
Slot pole pairs		6S4P		
Rotor magnet		BNM-8		
Control and power harness length	mm	205 ± 10		●
Control and power harness end connector		A1501H00-6P		●
Control and power harness		UL1007 26AWG 300V 80°C		●
Connector on motor body		JST:B6B-ZR		
Shaft length from flange	mm	13		●
Shaft diameter ø	mm	2.3		
Housing material		SECD-0 0.7T		
Shaft material		SUS420 J2		
Magnet material		Bonding NdFeB		
Rotor balancing grade		G6.3		
Service life	hrs	5000		
Manufacturing standard		ISO9001   TS16949		

CABLE AND PIN CONFIGURATION INTERNAL DRIVER

Color	Signal	Description	C
Red	Vcc	Supply voltage 12 V   24 V	
Black	GND	0 V	
Yellow	DIR	Motor direction. Open DIR: CW   DIR connect to GND: CCW	
Blue	PWM	Speed control. PWM 20 kHz 5V. Full speed, connects to GND. PWM, HI/LO, 0/100	
White	Enable	Enable control. Open: motor runs   Connect to GND: motor stops	

MOTOR DATA DIAGRAM 24V

