


## DRAWING (mm)



## PHOTO

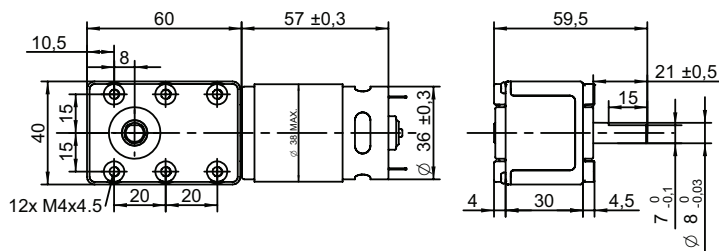


## MODEL NO. DESIGNATION

WRD4057 - VOLTAGE - GEAR RATIO

Example: WRD4057-12-75

## OPTIONS POWER SUPPLIES



● C = Customizations are offered on demand even for smaller quantities. Typical customizations indicated with green dot at column end. Please contact us for any customization request.

DC MOTOR DATA		12 V	24 V
Nominal voltage	V	12	24
No load current	A	0.3	0.16
Nominal current	A	1.6	1.2
No load speed	rpm	6000	5200
Nominal speed	rpm	6000	5200
Nominal torque	Ncm	2	2.8
Nominal power	W	11	15
Service life	hrs	300	300

GEAR MOTOR DATA 12V										
Gear ratio		50:1	75:1	100:1	150:1	200:1	350:1	600:1	700:1	1050:1
Nominal torque	Ncm	20	29	39	59	78	98	200	200	200
Nominal speed	rpm	100	69	52	35	26	15	9	7	5
Mechanical power	W	2.1	2.1	2.1	2.1	2.1	1.5	1.8	1.6	1.0
Weight	g	440	440	440	440	440	440	440	440	440
Rotation direction		CW						CCW		

GEAR MOTOR DATA 24V										
Gear ratio		50:1	75:1	100:1	150:1	200:1	350:1	600:1	700:1	1050:1
Nominal torque	Ncm	28	41	56	83	98	98	200	200	200
Nominal speed	rpm	100	68	51	34	26	15	9	7	5
Mechanical power	W	2.9	2.9	3.0	3.0	2.6	1.5	1.8	1.5	1.0
Weight	g	440	440	440	440	440	440	440	440	440
Rotation direction		CW						CCW		